




ACTIVE SUB

Design	Subwoofer
Impedance	-
Power Handling (AES)	800 Watts (continuous)
Maximum Power Handling (AES)	-
Sensitivity 2.83V / 1m	-
Maximum SPL	131 dB peak
Frequency Response -3 dB	45 Hz - 105 kHz
Dispersion	Omni
SYSTEM OPERATION	
Recommended Amplification	-
System Controller	-
Speaker Cables	-
PRODUCT FEATURES	
Components	1 x 18"
Crossover	-
Connectors	Female XLR input, Male XLR link, Powercon I/O
Dimensions (H x W x D)	758.3 mm x 525 mm x 450 mm
Weight (kg)	34.8
Shipping Weight (kg)	36.8 (1 cabinet per carton)
Colour	Black
Options	Available in white or Ral colours on request
Rigging	
HARDWARE	
Fitted as standard	TP-1P Threaded Adaptor Plate
Optional	-
Additional Descriptive Data	Birch plywood construction, with durable scratch resistant black textured paint finish, kick-proof steel grill with stainless steel Ohm logo.


FRONT




SIDE

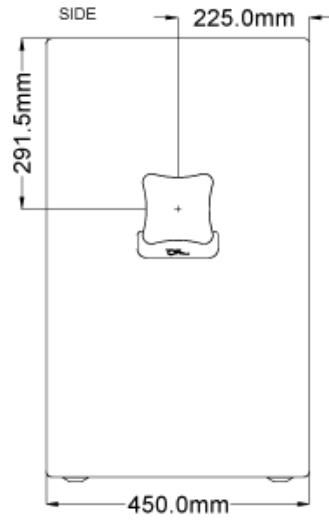

BACK

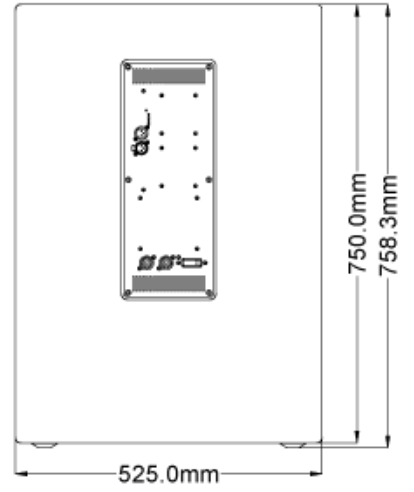

TOP

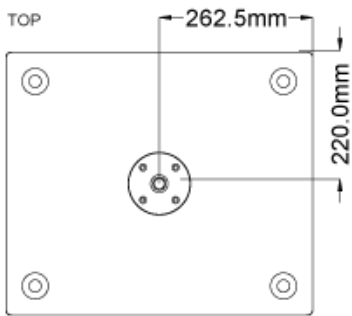

BOTTOM

