





Public Address / AS-B Active

AMPLIFIER SPECIFICATIONS	
Output Power (1 kHz THD<0.1%)	Mid-Hi 2 x 200 Watts @ 4 Ohm, Subwoofer 300 Watts @ 4 Ohm
Signal / Noise Ratio	>100dB
Input Impedance	20 K Ohm Balanced
Input Sensitivity	0.77V / 1.4V
Variable Crossover Frequency	100 H z- 150 Hz
Input Connectors	Neutrik® Combo, RCA Phono
Links	Neutrik® XLR, RCA Phono
Output Connectors	Neutrik® speakon connectors
Protection	Full Short Circuit, Open Circuit, Thermal, On/Off Muting
Cooling	Two Speed Fan
Power Supply	AC 230V 50HZ
Controls	0.77V/1.4V Input Sensitivity Switch, 0°/180° Phase Switch, Bass Gain, Crossover Frequency, Mid-Hi Gain, Auto Power Switch, Earth Lift, Mains Switch
SPEAKER SPECIFICATIONS	
Design	Subwoofer, reflex loaded
Impedance	4
Power Handling (AES)	187.5 Watts
Maximum Power Handling (AES)	375 Watts 750 Watts
Maximum SPL	124 dB
Frequency Response - 3 dB	48 Hz - 150 Hz
Active Crossover	-
Dispersion	Omni
Components	2 x 10" Low frequency drivers
Speaker Cables	Min 2 x 2.5 mm ² , Preferred 2 x 4
Colour	Black or White
Dimensions (H x W x D)	313 mm x 670 mm x 580 mm
Weight (kgs)	38
Shipping weight (kgs)	39
Rigging	-
Optional hardware	-
Additional Descriptive Data	18 mm MDF


Front

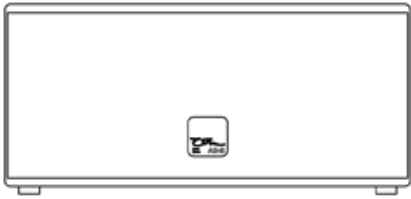

Side

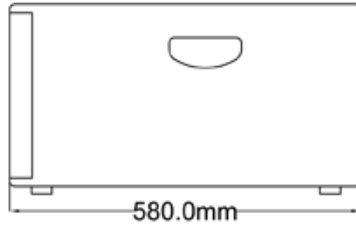

Rear

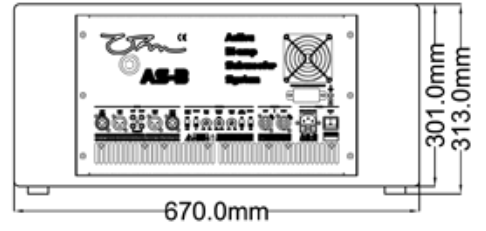

Top



Bottom

