




HD Series / HD-BB

Design	Subwoofer
Impedance	2 x 4 Ohm
Power Handling (AES)	2 x 1500 Watts (continuous)
Maximum Power Handling (AES)	2 x 3000 Watts (program) 2 x 6000 Watts (peak 10 ms)
Sensitivity 2.83V / 1m	104 dB
Maximum SPL	138 dB (cont. max SPL / 1m) 144 dB peak
Frequency Response -3 dB	37 Hz - 130 Hz
Dispersion	Omni
SYSTEM OPERATION	
Recommended Amplification	1500 - 3000 Watts
System Controller	Ohm DSP Solutions
Speaker Cables	Min 2 x 4 mm ² , Preferred 2 x 6 mm ²
PRODUCT FEATURES	
Components	4 x 18" Low frequency drivers
Crossover	-
	LPF 100 Hz
	HPF 35 Hz
Connectors	2 x 4 pole Speakon Connectors
Dimensions (H x W x D)	1156 mm x 578 mm x 856 mm
Weight (kg)	134
Shipping Weight (kg)	136 (1 cabinet per carton)
Colour	Black
Options	Available in white or Ral colours on request
Rigging	4 x flying track to take flying eyes. 1 x full cabinet length on each side and 2 x on the rear.
HARDWARE	
Fitted as standard	4 x flying track
Optional	EP-5 Connector Option
Additional Descriptive Data	Birch plywood construction, with durable scratch resistant black textured paint finish, kick-proof steel grill and black foam with stainless steel Ohm logo.


Front




Side

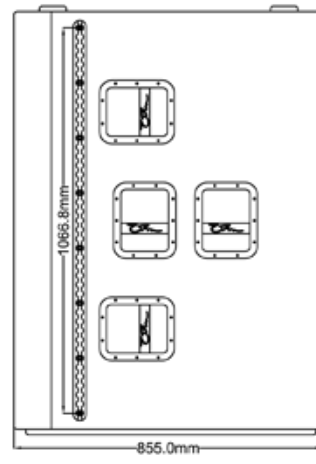

Back

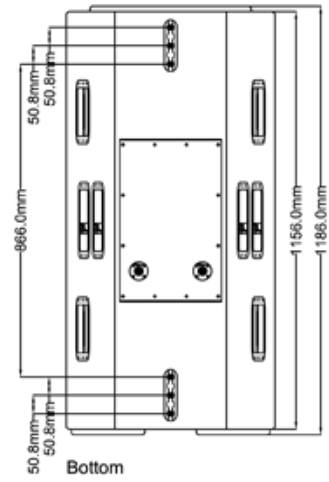

Top

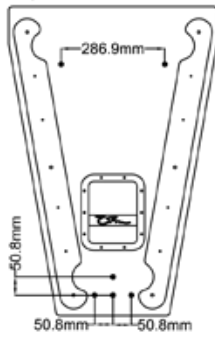

Bottom

