




Public Address / HGW-12

Design	Bandpass subwoofer
Impedance	8 Ohm
Power Handling (AES)	300 Watts (continuous)
Maximum Power Handling (AES)	600 Watts (program) 1200 Watts (peak 10 ms)
Sensitivity 2.83V / 1m	96 dB
Maximum SPL	123 dB (cont. max SPL / 1m) 129 dB peak
Frequency Response - 3dB	44 Hz – 110 Hz
Dispersion	Omni
SYSTEM OPERATION	
Recommended Amplification	300 - 600 Watts
System Controller	Ohm DSP Solutions
Speaker Cables	Min 2 x 2.5 mm ² , Preferred 2 x 4 mm ²
PRODUCT FEATURES	
Components	1 x 12" Low Frequency Driver
Crossover	-
Active Crossover	LPF - 125 Hz HPF - 45 Hz
Connectors	2 x 4 pole Speakon Connectors 2 x Binding Posts
Dimensions (H x W x D)	350 mm x 410 mm x 525 mm
Weight (kg)	23
Shipping Weight (kg)	24
Colour	Black, White
Options	Available in Ral colours on request
Rigging	-
HARDWARE	
Fitted as standard	-
Optional	-
Additional Descriptive Data	18 mm MDF construction, with durable scratch resistant, textured paint finish, kick-proof steel grill finished with stainless steel Ohm logo.


FRONT

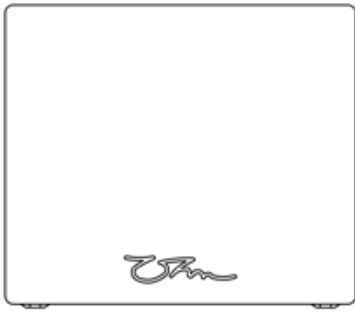

SIDE



BACK

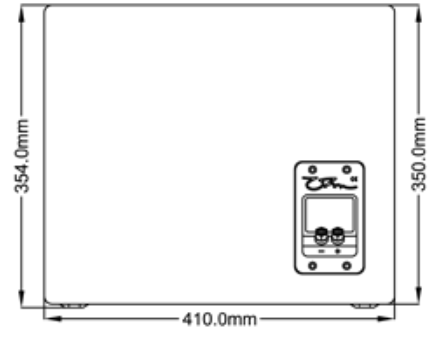

TOP



BOTTOM

