



## Public Address / HGW-8

Design	Reflex tuning subwoofer
Impedance	16 Ohm
Power Handling (AES)	120 Watts (continuous)
Maximum Power Handling (AES)	240 Watts (program) 480 Watts (peak 10 ms)
Sensitivity 2.83V / 1m	92 dB
Maximum SPL	112 dB (cont. max SPL / 1m) 128 dB peak
Frequency Response - 3dB	55 Hz – 200 Hz
Dispersion	Omni
<b>SYSTEM OPERATION</b>	
Recommended Amplification	120 - 240 Watts
System Controller	Ohm DSP Solutions
Speaker Cables	Min 2 x 2.5 mm <sup>2</sup> , Preferred 2 x 4 mm <sup>2</sup>
<b>PRODUCT FEATURES</b>	
Components	1 x 8" Low Frequency Driver
Crossover	-
Active Crossover	LPF - 125 Hz HPF - 55 Hz
Connectors	2 x 4 pole Speakon Connectors 2 x Binding Posts
Dimensions (H x W x D)	310 mm x 290 mm x 390 mm
Weight (kg)	12
Shipping Weight (kg)	13
Colour	Black, White
Options	Available in Ral colours on request
Rigging	-
<b>HARDWARE</b>	
Fitted as standard	-
Optional	-
Additional Descriptive Data	18 mm MDF construction, with durable scratch resistant, textured paint finish, kick-proof steel grill finished with stainless steel Ohm logo.


FRONT



SIDE



BACK

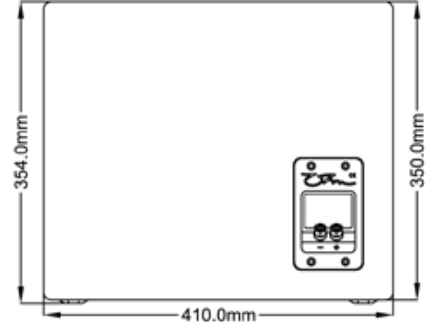

TOP



BOTTOM

