



## TRS Series / TRS-115

Design	Full Range Cabinet / Monitor, Reflex Tuning
Impedance	8 Ohm
Power Handling (AES)	500 Watts (continuous)
Maximum Power Handling (AES)	1000 Watts (program) 2000 Watts (peak 10 ms)
Sensitivity 2.83V / 1m	100 dB
Maximum SPL	127 dB (cont. max SPL / 1m) 133 dB peak
Frequency Response -3 dB	85 Hz - 19 kHz
Dispersion	60° x 40°
<b>SYSTEM OPERATION</b>	
Recommended Amplification	500 - 1000 Watts
System Controller	Ohm DSP Solutions, only HPF required
Speaker Cables	Min 2 x 2.5 mm <sup>2</sup> , Preferred 2 x 4 mm <sup>2</sup>
<b>PRODUCT FEATURES</b>	
Components	1 x 15" Low Frequency Driver 1 x 1.5" Horn loaded Compression Driver
Crossover	Passive
Connectors	2 x 4 pole Speakon Connectors
Dimensions (H x W x D)	700 mm x 506 mm x 348 mm
Weight (kg)	36
Shipping Weight (kg)	38 (1 cabinet per carton)
Colour	Black
Options	Available in white or Ral colours on request
Rigging	6 x mounting points, to take flying eyes, top hat adapter for pole mount
<b>HARDWARE</b>	
Fitted as standard	TH-1 top hat CFPK Recessed flying points
Optional	ABS-1 Adjustable stand bracket ABT-1 Adjustable threaded spigot bracket CFEK Set of three flying eyes LWB Large wall bracket SS-1 Speaker stand TP-1 Adjustable threaded pole EP-5 Connector Option
Additional Descriptive Data	Birch plywood construction, with durable scratch resistant black textured paint finish, kick-proof steel grill with stainless steel Ohm logo.


FRONT




SIDE



BACK

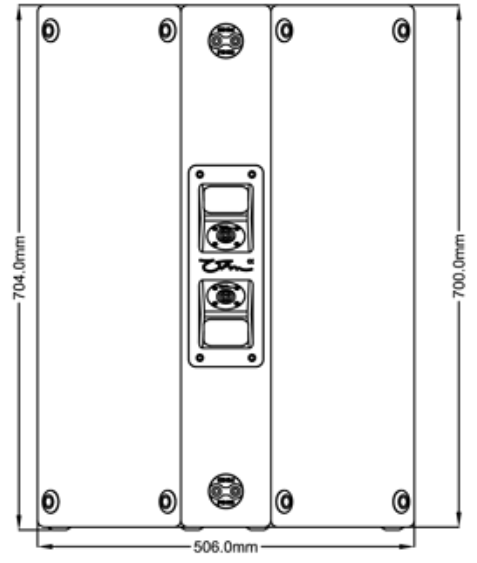

TOP

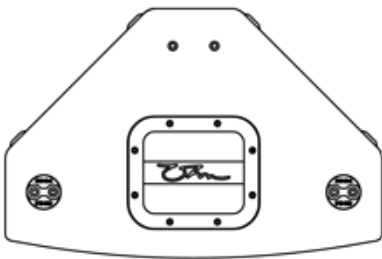

BOTTOM

