




TRS Series / TRS-212

Design	Full Range Cabinet, Reflex Tuning
Impedance	4 Ohm
Power Handling (AES)	625 Watts (continuous)
Maximum Power Handling (AES)	1250 Watts (program) 2500 Watts (peak 10 ms)
Sensitivity 2.83V / 1m	106 dB
Maximum SPL	134 dB (cont. max SPL / 1m) 140 dB peak
Frequency Response -3 dB	80 Hz - 20 kHz
Dispersion	60° x 40°
SYSTEM OPERATION	
Recommended Amplification	625 - 1250 Watts
System Controller	Ohm DSP Solutions
Speaker Cables	Min 2 x 2.5 mm ² , Preferred 2 x 4 mm ²
PRODUCT FEATURES	
Components	2 x 12" Low Frequency Drivers 1 x 1.5" Horn loaded Compression Driver
Crossover	Passive, also available on Bi-amp version.
Connectors	2 x 4 pole Speakon Connectors
Dimensions (H x W x D)	946 mm x 568 mm x 445 mm
Weight (kg)	54
Shipping Weight (kg)	56 (1 cabinet per carton)
Colour	Black
Options	Available in white or Ral colours on request
Rigging	6 x mounting points to take flying eyes
HARDWARE	
Fitted as standard	6 x CFPK Recessed flying points
Optional	CFEK Set of three flying eyes EP-5 Connector Option
Additional Descriptive Data	Birch plywood construction, with durable scratch resistant black textured paint finish, kick-proof steel grill and black foam with stainless steel Ohm logo.


FRONT

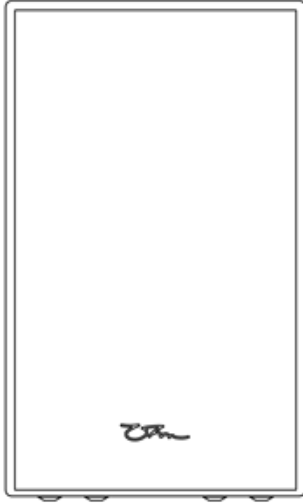


SIDE



BACK

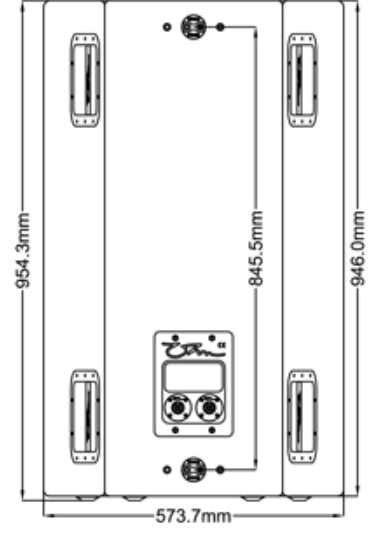

TOP



BOTTOM

