




## TRS SERIES / TRS-218

Design	Subwoofer, Manifold loaded
Impedance	4 Ohm
Power Handling (AES)	1250 Watts (continuous)
Maximum Power Handling (AES)	2500 Watts (program) 5000 Watts (peak 10 ms)
Sensitivity 2.83V / 1m	104 dB
Maximum SPL	135 dB (cont. max SPL / 1m) 141 dB peak
Frequency Response - 3 dB	30 Hz – 300 Hz
Dispersion	Omni
<b>SYSTEM OPERATION</b>	
Recommended Amplification	1250 - 2500 Watts
System Controller	Ohm DSP Solutions, HPF and LPF required
Speaker Cables	Min 2 x 4 mm <sup>2</sup> , Preferred 2 x 6 mm <sup>2</sup>
<b>PRODUCT FEATURES</b>	
Components	2 x 18" Low Frequency Drivers
Crossover	-
Connectors	2 x 4 pole Speakon Connectors
Dimensions (H x W x D)	576 mm x 1156 mm x 746 mm
Weight (kg)	90
Shipping Weight (kg)	92 (1 cabinet per carton)
Colour	Black
Options	Available on white and Ral colours on request
Rigging	Ohm cups and feet stacking system, cups for TRS tops.
<b>HARDWARE</b>	
Fitted as standard	Ohm cups and feet stacking system
Optional	EP-5 Connector Option
Additional Descriptive Data	Plywood construction, with durable scratch resistant, textured paint finish and kick-proof steel with stainless steel Ohm logo


FRONT




SIDE



BACK

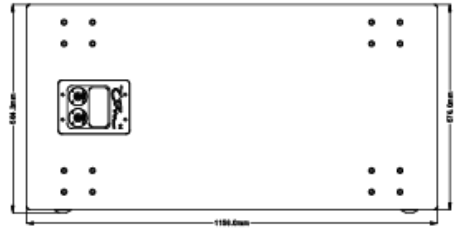

TOP

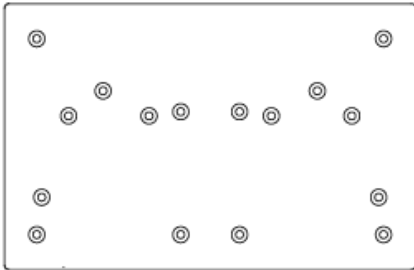

BOTTOM

